


HORIZONTAL MOTORS

FRAME: 440TS
TYPE: CE

PRINT #: 07-2127
EFFECTIVE: 29-JAN-01
SUPERSEDES: 13-APR-99

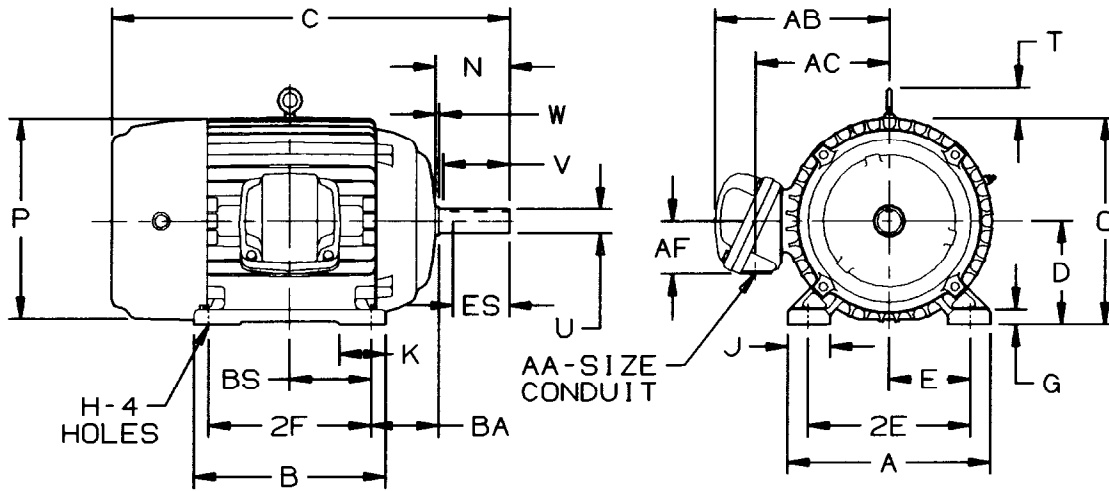

ALL DIMENSIONS ARE IN INCHES & MILLIMETERS

UNITS	A	E	G	J	K	T	N	O	P ²
INCH	22.00	9.00	1.50	4.00	4.00	3.25	5.00	22.75	23.50
MM	559	229	38	102	102	83	127	578	597

UNITS	V MIN	W	AA	AB	AC	AF	BA	ES MIN	SQ KEY
INCH	4.50	.25	3-1/2 NPT	21.13	16.50	8.06	7.50	3.00	.625
MM	114	6		537	419	205	191	76	15.88

UNITS	D ⁴	2E ⁴	H ⁴	U ⁴
	-.06	±.03	+.05	-.001
INCH	11.00	18.00	.81	2.375
MM	279.4	457.2	21	60.33

FRAME	UNITS	2F ⁴ ±.03	B	C	BS
444TS	INCH	14.50	17.50	40.13	7.25
	MM	368.3	445	1019	184
445TS	INCH	16.50	19.50	42.13	8.25
	MM	419.1	495	1070	210
447TS	INCH	20.00	23.00	45.63	10.00
	MM	508	584	1159	254

1: ALL ROUGH CASTING DIMENSIONS MAY VARY BY .25"
DUE TO CASTING VARIATIONS.
2: LARGEST MOTOR WIDTH.

3: CONDUIT BOX MAY BE LOCATED ON EITHER SIDE
OF MOTOR. CONDUIT OPENINGS MAY BE LOCATED IN
STEPS OF 90 DEGREES REGARDLESS OF LOCATION.
STANDARD AS SHOWN WITH CONDUIT OPENING DOWN.
4: TOLERANCE UNITS ARE IN INCHES ONLY.

CERTIFIED BY: _____ DATE: _____

